

# EBCO Below Ground Boundary Box Unsealed Rigid Gunmetal Base Manifold



1" BSP Female  
Connections Class 2.R.C

12 Bar pressure rating Grade C load bearing (where applicable)



## Unsealed Rigid Gunmetal Manifold


Part Number	Connections	Shut off	Manifold	Height (A)	Lid
MBB0841SB2	1" BSP inlet/outlet	¼ Turn	Gunmetal - Base	744mm	Tilt Pluck Swivel Square

\*Lid marked "Water"

# EBCO Below Ground Boundary Box

## Unsealed Rigid Gunmetal Base Manifold

Feature	Single Telescopic
Frame & Cover	Pluck Lid: Pluck lid. Square swivel frame. Lid tether as standard. Polypropylene. Grade C load bearing according to WIS 4-37-01
Guard Tube Material	PVC
Guard Tube Profile	Cylindrical with 250mm diameter
Height Adjustment (approx)	779mm (inc. surface box height. Cut tube to shorten)
Frost Protection	As standard in accordance with WIS 4-37-01.
Water Tightness	Unsealed
Shut Off Device	¼ turn gunmetal valve
Non Return Valve	In accordance with (WIS 5-11-01) BS EN 13959:2004 Family E Type B
Manifold	Base style: 1" Gunmetal
Meter Connection	(2" BSP) Concentric Meter-port (typically for Meters up to Qn3.5 rating)
Head Loss	< 3 metres @ 25 l/min flow-rate with meter in accordance with WIS 4-37-01
Inlet options	1" BSP in accordance with WIS 4-32-11
Outlet	Outlet as per selected inlet
Blanking Plugs	Full flow (standard) 27/28 tapered A/F hexagonal upstand. Plastic dust cap if required.
Product Weight (approx)	6 kg

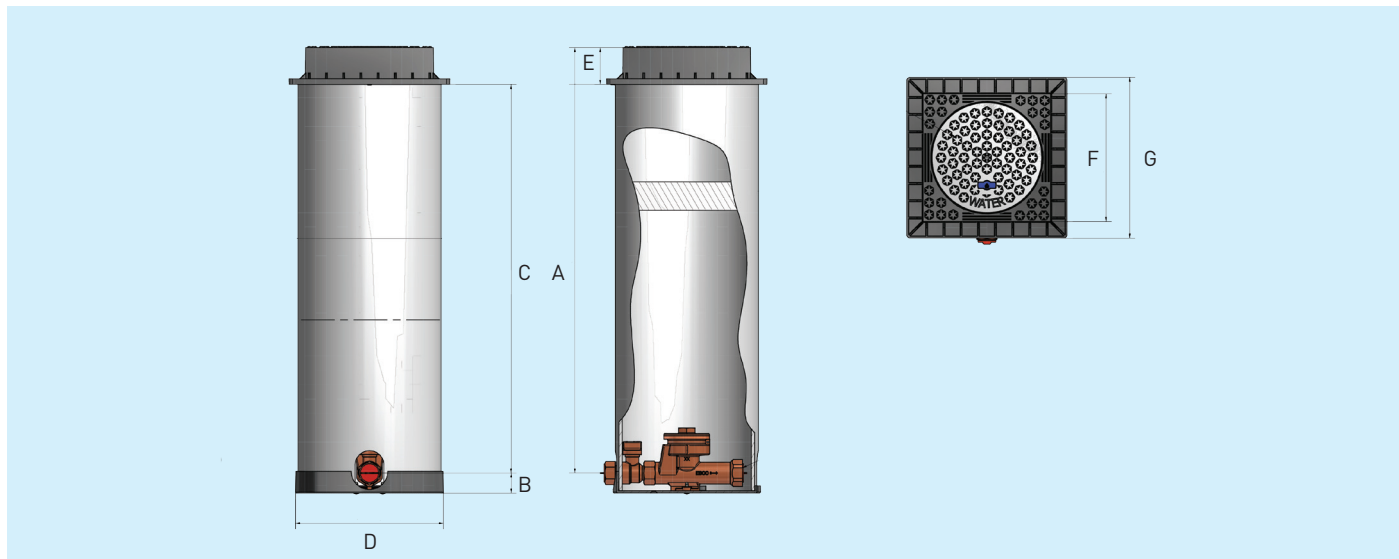

Part Number	A	B	C	D	E	F	G
MBB0841SB2	744mm	35mm	679mm	Ø258	65mm	222mm	280mm



Note: Specifications may be changed without notification at any time.  
Copyright: No copying without express written permission of TALIS.  
TALIS is a Registered Trademark. MBB0841SB2 (10/16)

### TALIS UK

Brackla Industrial Estate  
Bridgend, Wales CF31 2AX  
United Kingdom

PHONE +44 (0)845 077 9797

FAX +44 (0)845 077 9798

E-MAIL [enquiries@talis-group.com](mailto:enquiries@talis-group.com)

INTERNET [www.talis-uk.com](http://www.talis-uk.com)