

EBCO Below Ground Boundary Box Unsealed Plastic Base Manifold



Twin in 25mm B Pushfit twin out 25mm B Pushfit
Connections Class 2.R


16 Bar pressure rating Grade C load bearing

| Part Code | Connections | Shut Off | Manifold Style | Height |
|------------|----------------|--------------------|-------------------|--------|
| MBB0930CWC | 25mm B Pushfit | 1/4 Turn Clockwise | Base Plastic 3/4" | 670mm |
| MBB0931CWC | 25mm B Pushfit | 1/4 Turn Clockwise | Base Plastic 3/4" | 780mm |

EBCO Below Ground Boundary Box

Unsealed Plastic Base Manifold

| Feature | Specification |
|---------------------|---|
| Guard Tube Material | PVC |
| Guard Tube Profile | Cylindrical with 250mm diameter / 6mm |
| Frost Protection | As standard in accordance with WIS 4-37-01 |
| Water Tightness | Non-watertight |
| Shut Off Device | 1/4 Turn with fan head clockwise close |
| Non Return Valve | In accordance with WIS 5-11-01 |
| Manifold | Base style 3/4" Acetal |
| Meter Connection | 1 1/2 BSP concentric meters up to Qn 2.5m3/hr |
| Head Loss | < 3 meters @ 25 l/min flowrate with meter |
| Inlet | Twin 25mm B Pushfit |
| Outlet | Twin 25mm B Pushfit |
| Blank Plugs | 1 1/2" Meter housing dust cap |
| Product Weight | 10Kg |
| Tools | BOP77011: 27mm socket for meter plug and NVR BOP77008: Short T bar 400mm long BOP77009: T bar extension 500mm long FTK003: 5/8 W socket 1/2" drive meterplug & NVR BOP00618: 1/2" drive T bar |

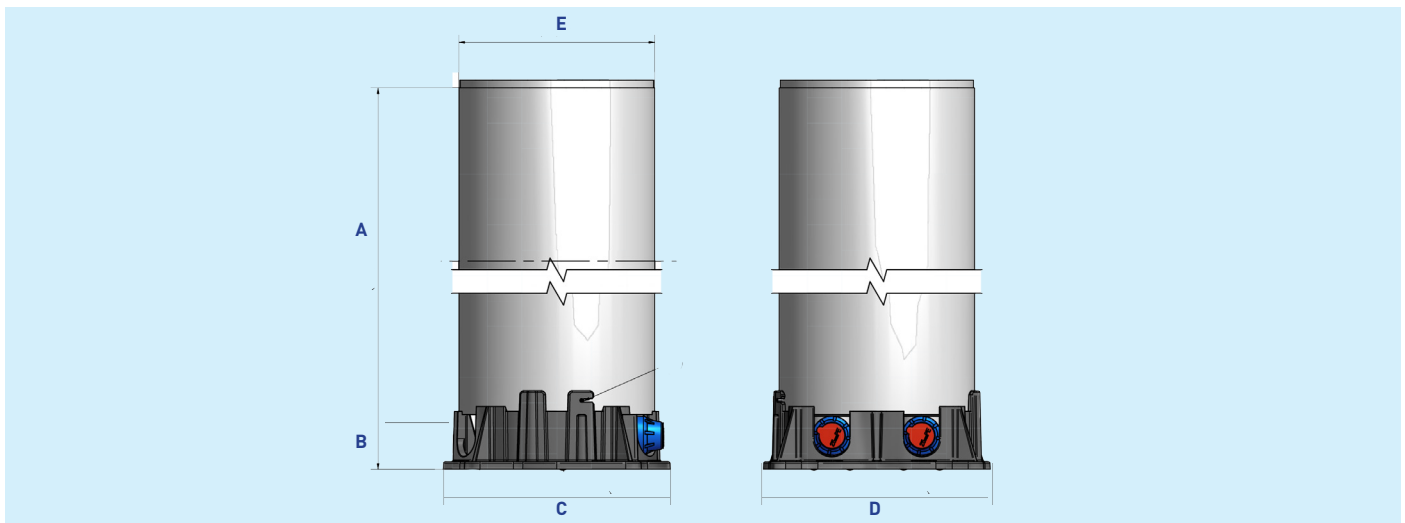

| Box | A | B | C | D | E |
|-------------------|-------|------|-------|-------|-------|
| EBCO - MBB0930CWC | 627mm | 43mm | 290mm | 290mm | 250mm |
| EBCO - MBB0931CWC | 627mm | 43mm | 290mm | 290mm | 250mm |

TALIS UK

Brackla Industrial Estate
Bridgend, Wales CF31 2AX
United Kingdom

Phone: +44 (0)845 077 9797

Fax: +44 (0)845 077 9798

E-Mail: enquiries@talis-group.com

Internet: www.talis-uk.com